


Features

- 6600W peak pulse power capability at 10/1000μs waveform, repetition rate (duty cycles):0.01%
- Excellent clamping capability
- Typical failure mode is a short circuit condition for current events exceeding component rating
- Plastic package is flammability rated V-0 per UL-94
- Meet MSL level1, per J-STD-020, lead-frame maximum peak of 245°C
- AEC-Q101 qualified


RoHS
Compliant



Applications

Typically use in sensitive electronics protection against voltage load dump induced by Automotive generator during current interruption.

Function Diagram

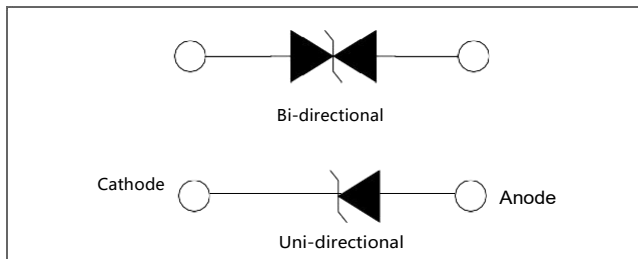

Maximum Ratings and Thermal Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Peak Pulse Power Dissipation at $T_A=25^\circ\text{C}$ by 10/1000μs Waveform (Fig.4)--single die	P_{PPM}	6600	W
Power Dissipation on Infinite Heat Sink at $T_L=25^\circ\text{C}$	P_D	8	W
Peak Forward Surge Current, 8.3ms Single Half Sine Wave (Note 1)	I_{FSM}	700	A
Maximum Instantaneous Forward Voltage at 50A for Unidirectional Only	V_F	3.5	V
Operating Temperature Range	T_J	-55 to 150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to 150	$^\circ\text{C}$

AGENCY	AGENCY FILE NUMBER
	Pending


Notes:

1. Measured on 8.3ms single half sine wave or equivalent square wave for unidirectional device only, duty cycle=4 per minute maximum.

Characteristics (T = 25°C unless otherwise noted)





Part Number (Uni)	Part Number (Bi)	Reverse Stand off Voltage V_R (Volts)	Breakdown Voltage V_{BR} (Volts) @ I_T		Test Current I_T (mA)	Maximum Clamping Voltage V_C @ I_{pp} (V)	Maximum Peak Pulse Current I_{pp} (A)	Maximum Reverse Leakage I_R @ V_R (μ A)	Agency Approval 
			MIN	MAX					
SM8S10A	SM8S10CA	10.0	11.10	12.30	5	17.0	388	20	
SM8S11A	SM8S11CA	11.0	12.20	13.50	5	18.2	363	15	
SM8S12A	SM8S12CA	12.0	13.30	14.70	5	19.9	332	10	
SM8S13A	SM8S13CA	13.0	14.40	15.90	5	21.5	307	5	
SM8S14A	SM8S14CA	14.0	15.60	17.20	5	23.2	284	5	
SM8S15A	SM8S15CA	15.0	16.70	18.50	5	24.4	270	5	
SM8S16A	SM8S16CA	16.0	17.80	19.70	5	26.0	253	5	
SM8S17A	SM8S17CA	17.0	18.90	20.90	5	27.6	239	5	
SM8S18A	SM8S18CA	18.0	20.00	22.10	5	29.2	226	5	
SM8S20A	SM8S20CA	20.0	22.20	24.50	5	32.4	204	5	
SM8S22A	SM8S22CA	22.0	24.40	26.90	5	35.5	186	5	
SM8S24A	SM8S24CA	24.0	26.70	29.50	5	38.9	170	5	
SM8S26A	SM8S26CA	26.0	28.90	31.90	5	42.1	157	5	
SM8S28A	SM8S28CA	28.0	31.10	34.40	5	45.4	145	5	
SM8S30A	SM8S30CA	30.0	33.30	36.80	5	48.4	136	5	
SM8S33A	SM8S33CA	33.0	36.70	40.60	5	53.3	124	5	
SM8S36A	SM8S36CA	36.0	40.00	44.20	5	58.1	114	5	
SM8S40A	SM8S40CA	40.0	44.40	49.10	5	64.5	102	5	
SM8S43A	SM8S43CA	43.0	47.80	52.80	5	69.4	95.1	5	
SM8S45A	SM8S45CA	45.0	50.00	55.30	5	72.7	90.8	5	
SM8S48A	SM8S48CA	48.0	53.30	58.90	5	77.4	85.3	5	
SM8S51A	SM8S51CA	51.0	56.70	62.70	5	82.4	80.1	5	
SM8S54A	SM8S54CA	54.0	60.00	66.30	5	87.1	75.8	5	
SM8S58A	SM8S58CA	58.0	64.40	71.20	5	93.6	70.5	5	
SM8S60A	SM8S60CA	60.0	66.70	73.70	5	96.8	68.2	5	
SM8S85A	SM8S85CA	85.0	94.40	104.00	5	137.0	48.2	5	
SM8S90A	SM8S90CA	90.0	100.00	111.00	5	146.0	45.2	5	

I-V Curve Characteristics

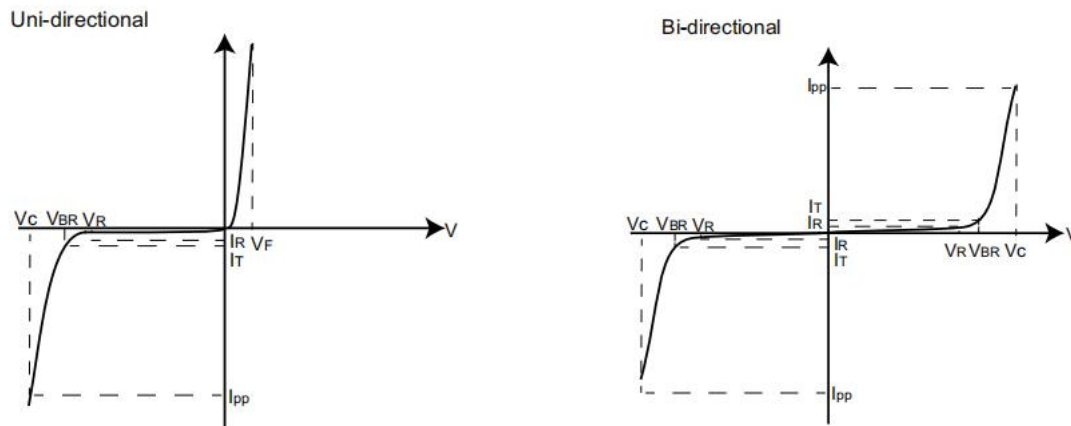

- P_{PPM} Peak Pulse Power Dissipation -- Max power dissipation
- V_R Stand-off Voltage -- Maximum voltage that can be applied to the TVS without operation
- V_{BR} Breakdown Voltage -- Maximum voltage that flows though the TVS at a specified test current (I_T)
- V_C Clamping Voltage -- Peak voltage measured across the TVS at a specified I_{ppM} (peak impulse current)
- I_R Reverse Leakage Current -- Current measured at V_R
- V_F Forward Voltage Drop for Uni-directional


Ratings and Characteristic Curves (T = 25°C unless otherwise noted)

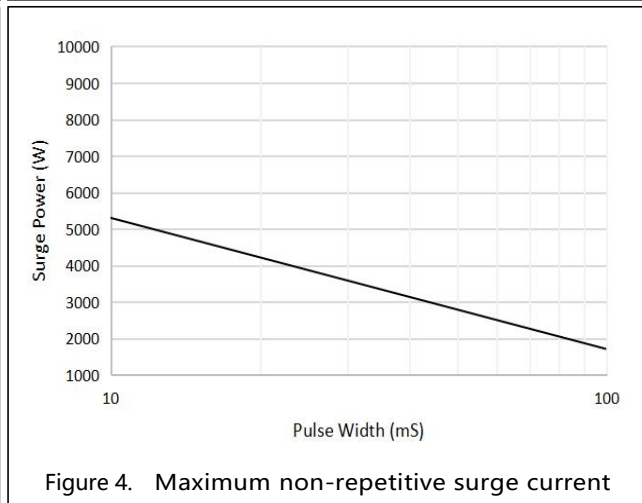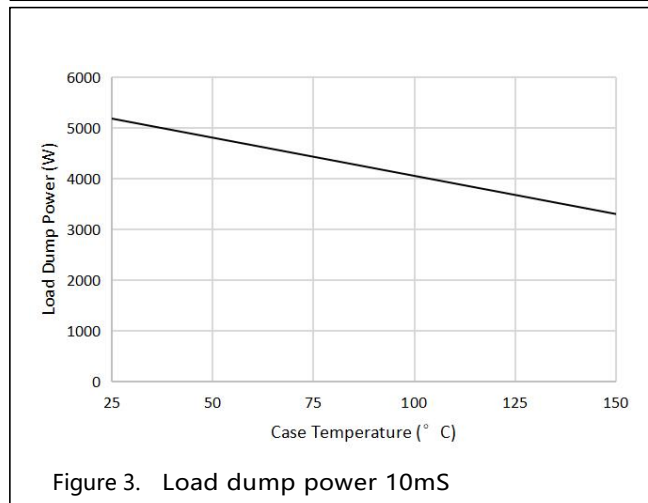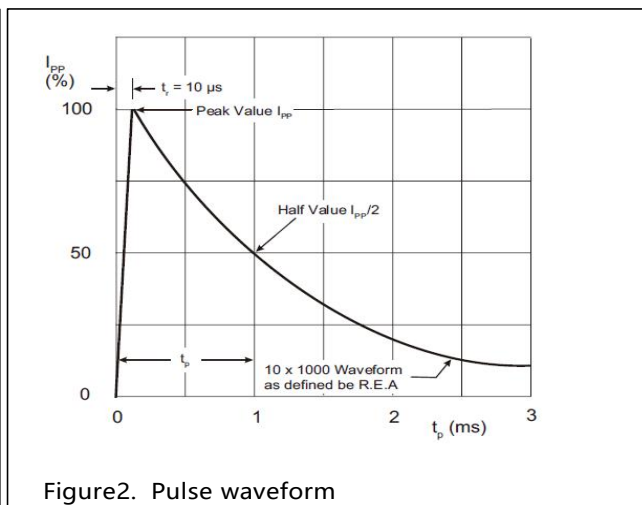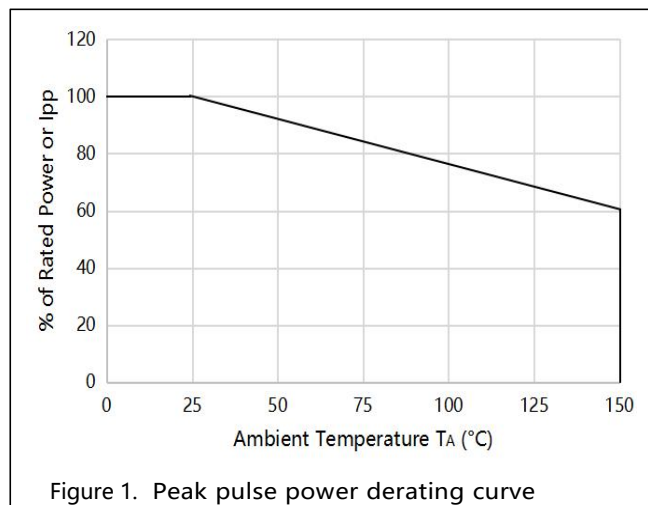



Soldering Parameters

Soldering profile

Reflow Condition		Lead-free assembly
Pre Heat	- Temperature Min ($T_{S(min)}$)	150°C
	- Temperature Max ($T_{S(max)}$)	200°C
	- Time (min to max) (t_s)	60 – 180 secs
Average ramp up rate (Liquidus Temp (T_A) to peak)		3°C/second max
$T_{S(max)}$ to T_A - Ramp-up Rate		3°C/second max
Reflow	- Temperature (T_A) (Liquidus)	217°C
	- Time (min to max) (t_s)	60 – 150 seconds
Peak Temperature (T_p)		260+0/-5 °C
Time within 5°C of actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_p)		8 minutes Max.
Do not exceed		260°C

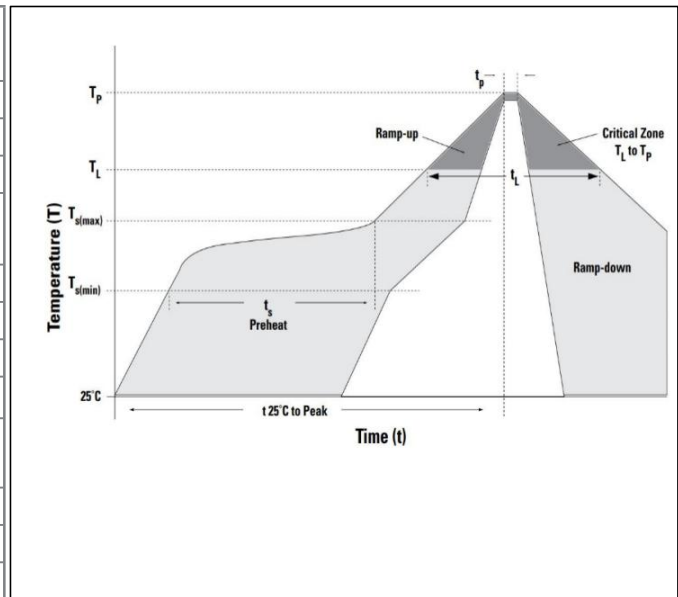


Dimensions

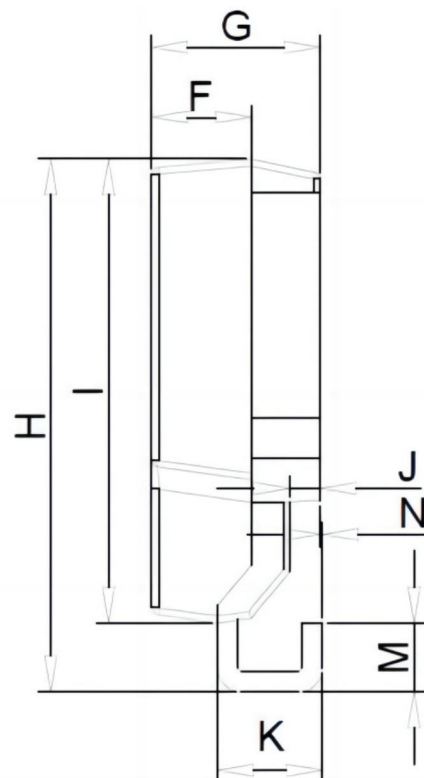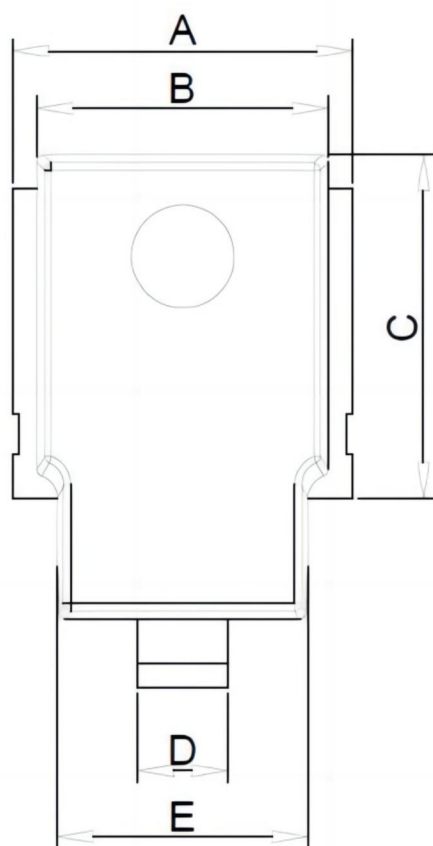


Note: Size units mm

Symbol	A	B	C	D	E	F	G	H	I	J	K	M	N
Max.	10.50	8.70	10.08	3.00	8.00	2.95	5.20	16.20	13.70	0.93	3.12	2.70	0.16
Min.	9.50	8.30	9.92	2.40	7.00	2.85	4.60	15.20	13.30	0.83	3.02	1.70	0.00

Part Numbering

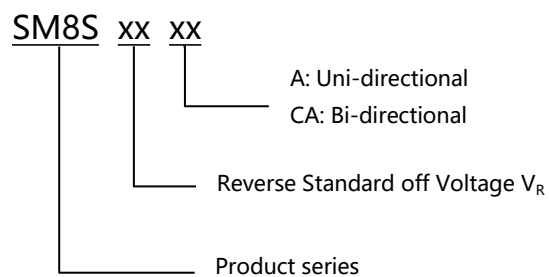


Part Marking

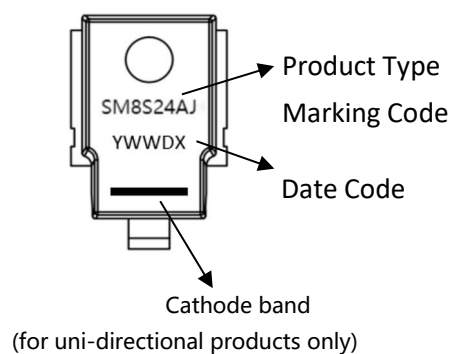

Packing

Part number	Package name	Small packing quantity	Packing method
SM8SXXXX	DO-218AB	750PCS	Tape & Reel

Tape and Reel Specification

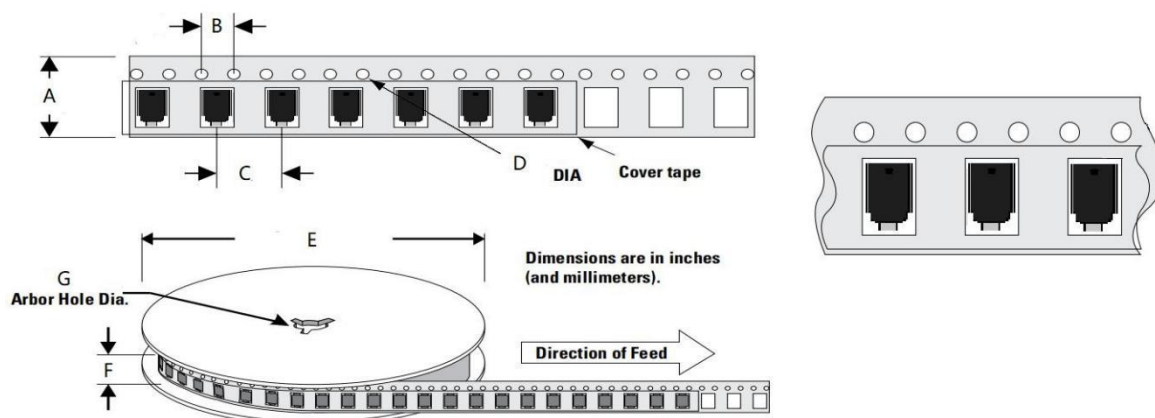

Symbol	Millimeter
A	24.00 ± 0.2
B	4.00 ± 0.2
C	16.00 ± 0.2
D	1.55 ± 0.2
E	330.0 ± 0.3
F	25.85 ± 0.2
G	13.30 ± 0.2

Revision history of Specification

Version	Change Items	Effective Date
1.0	Initial Release	13-July-2021
1.1	Replace the dimensional drawing	13- Dec-2022
1.2	Revised Part Marking ("S" to "J")	24- Aug-2023
1.3	Add New Voltage Products (45~60V)	20-Dec-2023
1.4	Add New Voltage Products (85~90V)	28-Dec-2023